

Description

- * Model No: 90108-****
- * Brass Construction
- * With two function, tub spout and handheld shower



Hand shower hose:

304 stainless steel. Universal extension does not tie High temperature resistant

Faucet base

Brass tripod base keep the faucet firm We have three expansion screws which will keep the faucet firm

Ceramic Cartridge CUPC Certified passed


Hot and Cold Waterlines:


- 1. Customizable length and diameter
- 2. Plated copper fittings and stainless steel sleeves
- 3. Flexible: hoses are proven to be more flexible than the conventional
- 4. High pressure resistance up to 100 bar
- 5.100% tested
- 6.Antibacterial compliant with applicable standards

Warranty

- * 5 years warranty in commercial installation use
- * lifetime limited warranty against leaks, drips.

Specifications

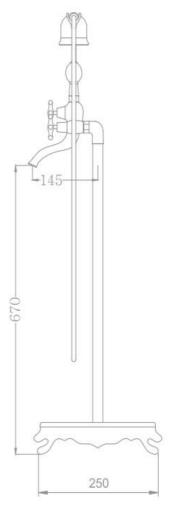

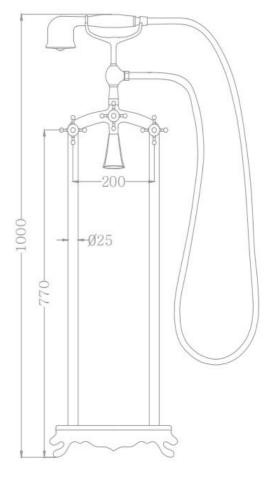

Install Guide of Floor Filler

1. Embedded inlet joint, cold and hot water inlet in about 15°



5.Install the high-pressure pipe



9.Connect the mail body of the tap with the pre-embedded water inlet and tighten the



2.Wrap the PTFE tape around the joint and tighten the joint(lay the tile after embedding)



6. Set of decorative plate



10.Insert the main body of the faucet into the screws and tighten the screws



Position with a tripod and use a drill to mark off the reserved screw holes.



7.Connect the main body of the faucet and tighten the high-pressure pipe and the faucet



11.Put down the decoration tray



4.fixing the tripod in the lower straight pipe



8.Put the screws into the pre-drilled hole



12,The installation is complete

